


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

| REVISIONS | | | | |
|-----------|--|------------|---------|----------|
| REV | DESCRIPTION | DATE | INITIAL | APPROVED |
| A | ADDED 2.50 REF. DIMENSION. | 9/24/2009 | WP | GE |
| 2 | REMOVED ENGRAVING NOTE. | 10/3/2009 | WP | RW |
| 2A | CH'D WAS CLEAR HARD ANODIZING IS CLEAR ANODIZING. | 10/27/2009 | WP | GE |
| 2B | SEPERATED TOOLS FROM KIT RBW6205G00331-3G. ADDED ENGRAVE NOTE AND BUFF NOTE. ADDED AW139 TO USED ON MODEL. | 10/17/2013 | CFS | RW |

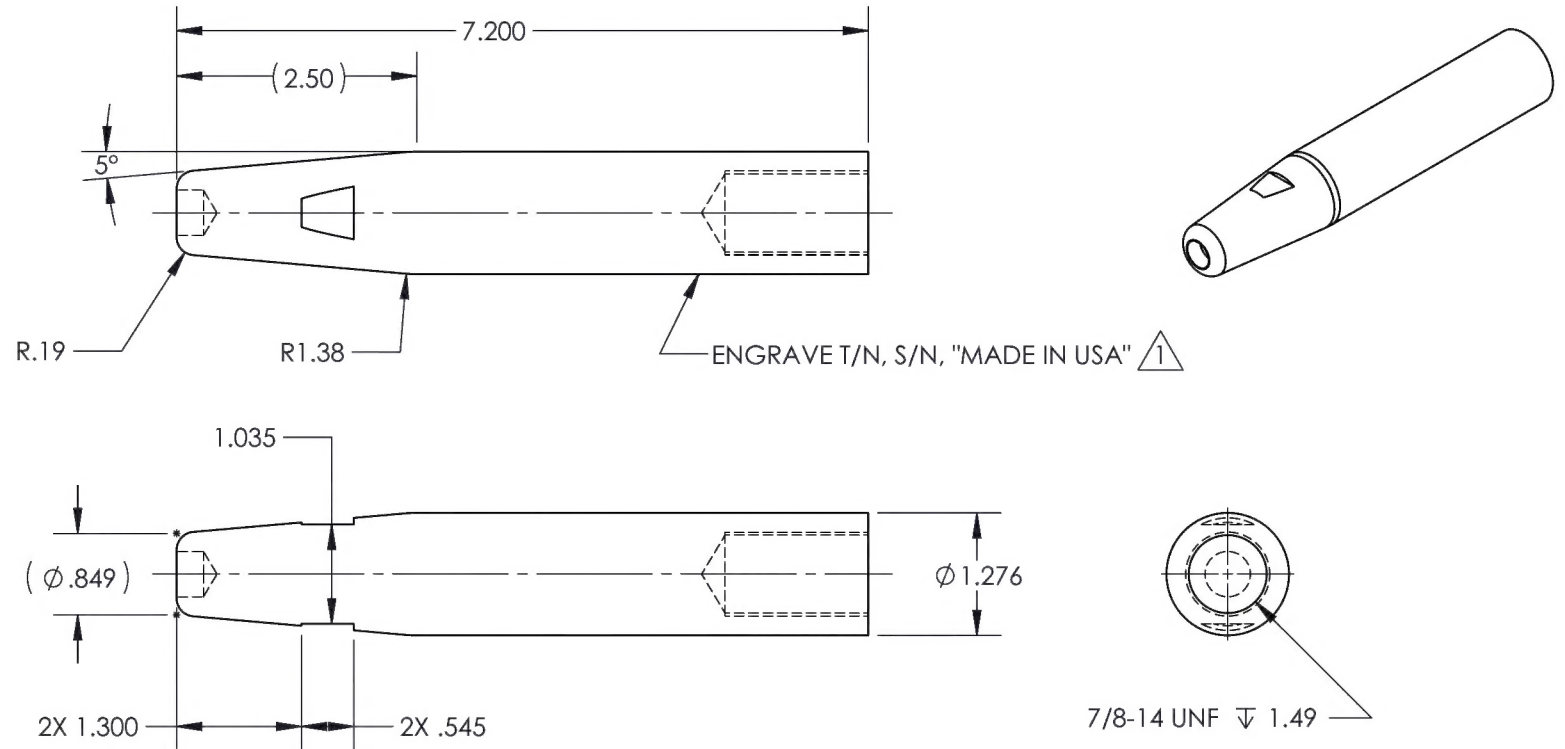

NOTE:

1 ENGRAVE LIGHTLY AND BUFF SMOOTH AFTER.

| | |
|--|------------------------------------|
| RED BARN MACHINE | |
| TITLE M/R BLADE RETENTION BOLT GUIDE | |
| DWG NO. RBW6205G03451-3G | REV 2B |
| MAT'L 6061 | DRAWN BY: SMITH |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | APPROVED <i>D Weil</i> |
| .XXX ± .005 FRACTIONS ± 1/32 | HEAT TREAT |
| .XX ± .01 ANGLES ± 5° | FINISH CLEAR ANODIZE |
| .X ± .1 | SPEC MIL-A-8625F, TYPE II, CLASS I |
| 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R | USED ON MODEL |
| 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | AGUSTA AW139 |
| SCALE 1:2 | DATE 10/17/2013 |
| SHEET 1 OF 1 | |

| ASSY QTY | ASSY QTY | B/O | Part # | UNIT QTY | Description | Material | B/O INFORMATION OR SPECIFICATIONS | PG. |
|----------|----------|-----|--------|----------|-------------|----------|-----------------------------------|-----|
| | | | | 1 | BOLT GUIDE | 6061 | Ø1-3/8 X 7-3/8 | 1 |